

# Baliza avertizare optica cu filament statica 140x150mm

## SBM

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Bazaz-140x150mm, Inaltime-135mm


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



### Series M

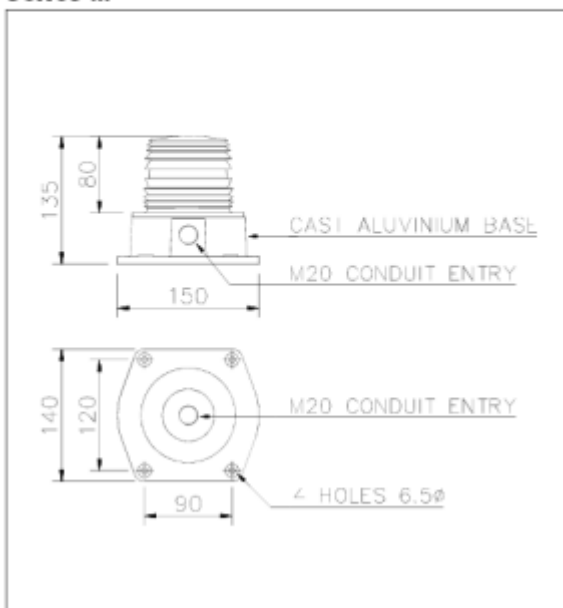

---

# Baliza avertizare optica cu filament statica 150x150mm unidirectional

## SBU

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Baza-150x150mm, Inaltime-150mm
- Se pot monta modular in mai multe culori, tip semafor

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

General

## Filament Beacons Series U



  
 deegree.com


Static (Continuous) Filament Lamp Static Indicators. Extensively configurable, comprising a robust Black Polycarbonate base and hood with coloured polycarbonate lens.

Multiple units from the Series T, Series U, Series V and Series W range can be joined together, including the matching ISD-T Sender and ISD-T Receiver Beacon, to provide an integrated signalling system. Standard unit supplied with voltage appropriate D15d (SBC) lamp. Optionally available without lamp (SBUVU/C/D/B15d/Colour).

Hood assembly is fitted to the base using a gasket and three screws. Mounting to panels, walls or brackets is by four external mounting holes.

A compression cable gland and anti-condensation heater is supplied.



Obstruction

Available

Explosionproof


Accessories

	80V/100W/40	80V/100W/100	80V/100W/40	80V/100W/100	80V/100W/40
Supply Voltage	12V/24V/48V/60V	24V/48V/60V/80V	48V/60V/80V/100V	100V/120V/150V/180V	230V/240V/250V/260V
Minimum Supply Voltage	10.2V/AC	20.4V/AC	40.8V/AC	97.7V/AC	99.8V/AC
Maximum Supply Voltage	13.8V/AC	27.6V/AC	55.2V/AC	130V/AC	264.2V/AC
Startup Current Inrush	1.75A	3.50A	7.00A	15.0A	100mA
Peak Operating Current	80mA				
Rated Lamp Power	25W	25W	50W	100W	200W
Flash Rate	Non-Flashing (Continuous) or Pulse				
Light Output (lm)	83 lm	83 lm	166 lm	332 lm	664 lm
Beam Angle	12°	12°	24°	48°	96°
Colour	Red	Green	Blue	White	Yellow
Operating Temperature Range	-20 to +50 degrees C				
Net Product Weight	60g	60g	120g	240g	480g

D.G. Controls Limited, Colley Hill Road, Southwold, Suffolk, UK, IP11 1TB  
Tel: +44 (0)1280 538000 Fax: +44 (0)1280 530170 email: mail@deegree.com

84-02

## SBU/B15d Static Lamp Beacon

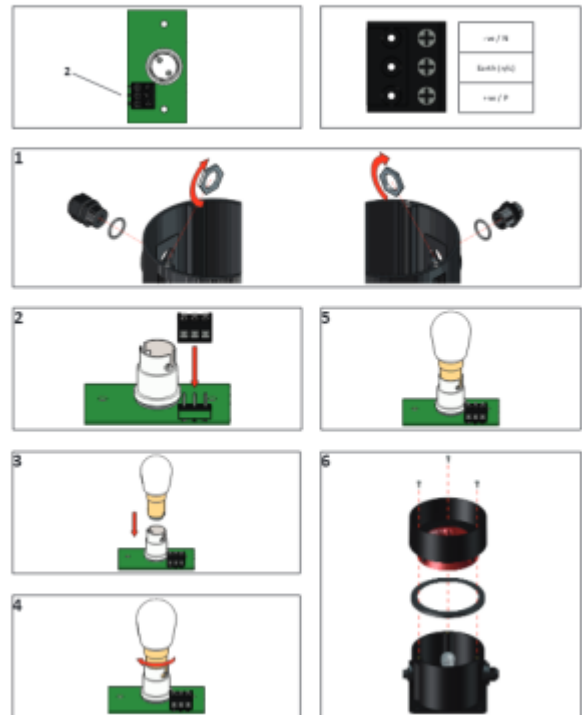

  
 deegree.com


D.G. Controls Limited, Colley Hill Road, Southwold, Suffolk, UK, IP11 1TB  
Tel: +44 (0)1280 538000 Fax: +44 (0)1280 530170 email: mail@deegree.com

030849/06.01.2018


  
 D.G. Controls Limited

### Series U

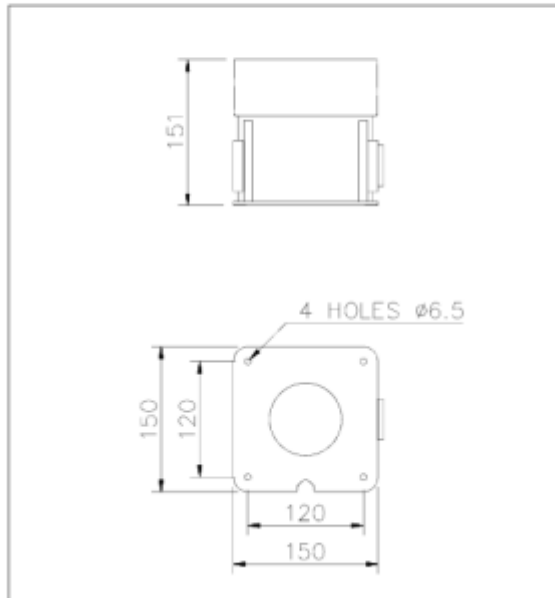

# Baliza avertizare optica cu filament statica diam. 94mm

## SBB

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-135mm, diametru-94mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



# Baliza avertizare optica cu filament statica diam.123mm

## SBL


- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-133mm, diametru-123mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

Series 'L'

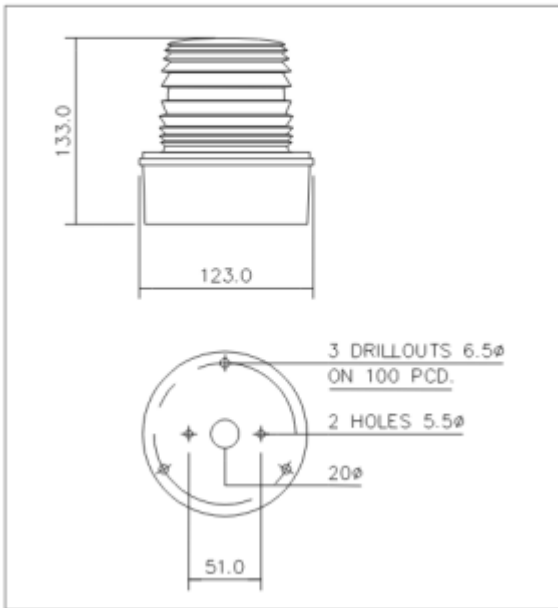

# Baliza avertizare optica cu filament statica diam.140x150mm compacta

## SBS

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Baza-140x150mm, Inaltime-95mm


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- ROSU
- GALBEN (AMBER)
- VERDE
- ALBASTRU
- TRANSPARENT



### Series S

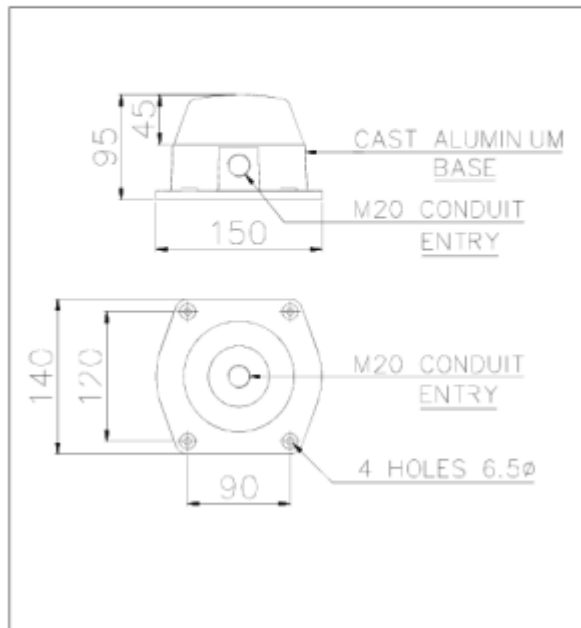

---

**Baliza avertizare optica cu filament statica diam.175mm**

# SBH

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-225mm, diametru-175mm
- Compatibil cu sistemele BESA


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



### Series H

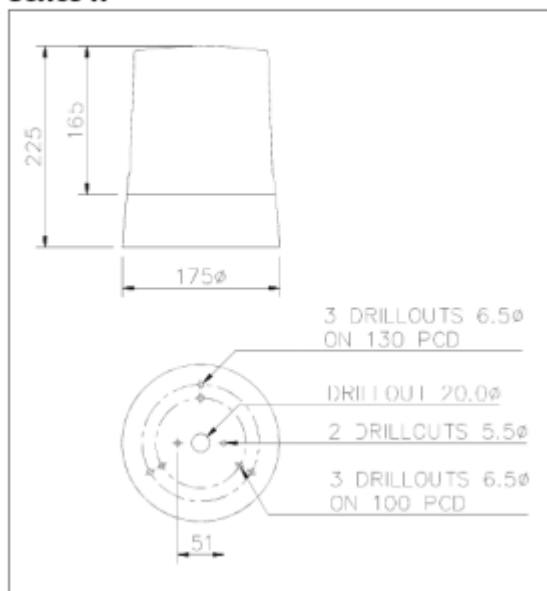



# Baliza avertizare optica cu filament statica diam.94mm compacta

## SBC

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-85mm, diametru-94mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



---

# Girofar cu filament static 150x150mm


## SBT

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Baza-150x150mm, Inaltime-250mm

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

**Series T**

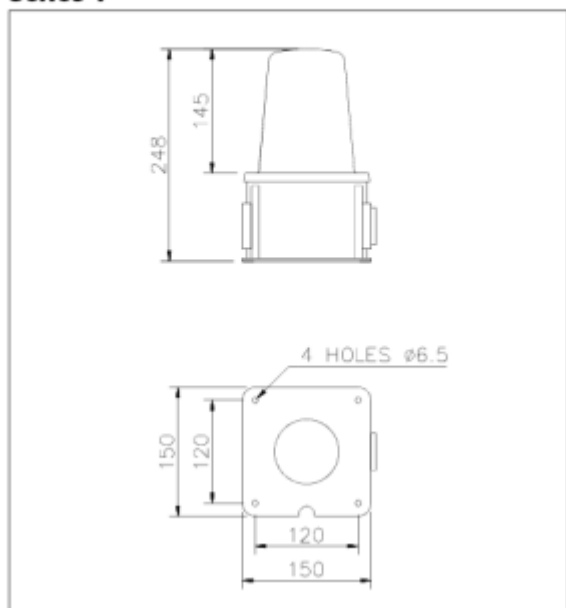

---

# Girofar cu filament static 150x150x190

## SBV

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Baza-150×150, Inaltime-190mm

Se livreaza complet asamblat, cu urmatoarele optiuni:


## Lentile

- **ROSU**

- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



**Series V**

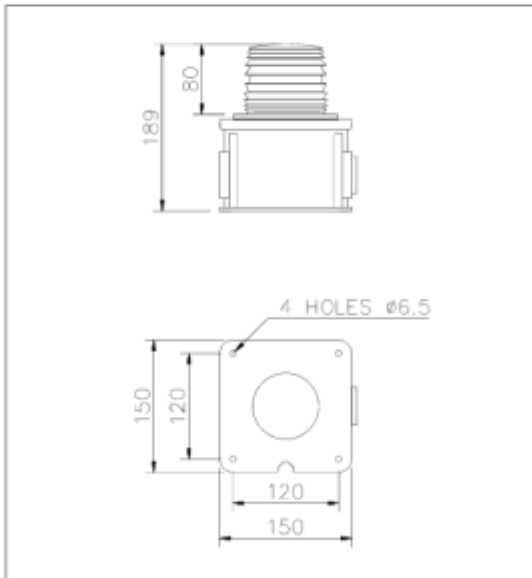

# Girofar cu filament static 255x265mm

## SBJ

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Baza-255x265mm Inaltime-212mm


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



**Series J**

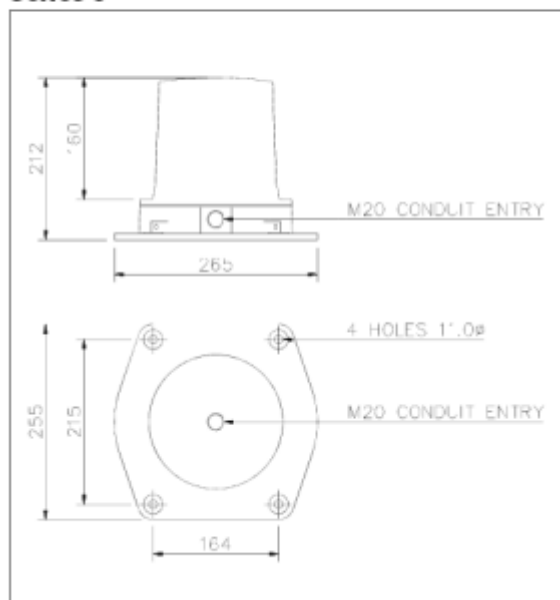

---

**Girofar cu filament static  
diam. 164mm**

# SBE

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-196mm, diametru-164mm
- Compatibil cu sistemele BESA


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**



### Series E

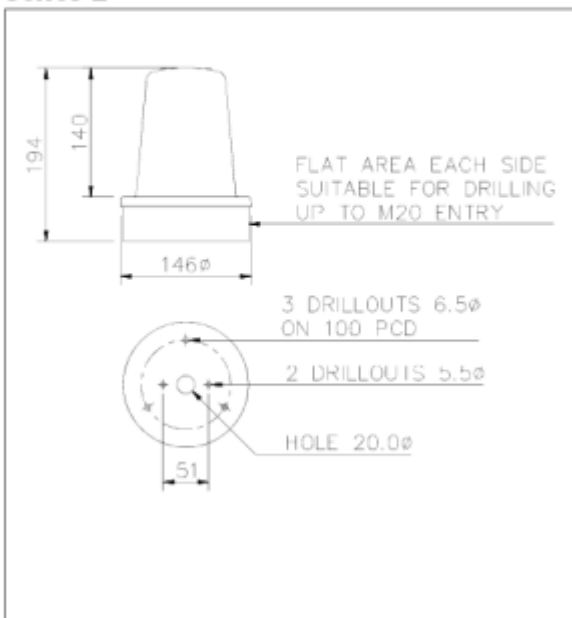

# Girofar cu filament static diam.123mm compact

## SBR


- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-92mm, diametru-79mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

**Series R**

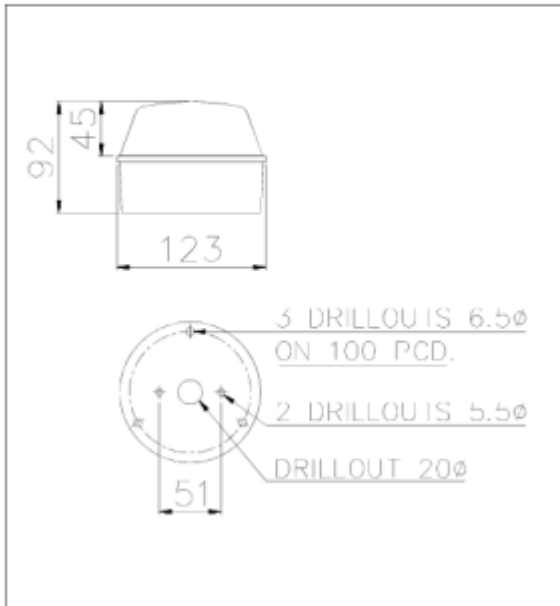

# Girofar cu filament static diam. 165mm

## SBK

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-185mm, diametru-165mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:




## Lentile

- ROSU
- GALBEN (AMBER)
- VERDE
- ALBASTRU
- TRANSPARENT

**deegee**  
D.G. Controls Limited

### Series K

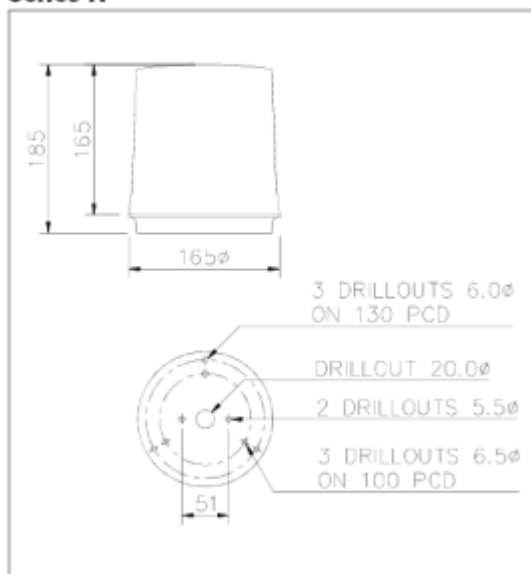

D.G. Controls Limited



---

## Girofar cu filament static diam.256mm

### SBG

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si

230Vac15W

- Inaltime-220mm, diametru-256mm


Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

**deegee**  
D.G. Controls Limited

Series 'G'

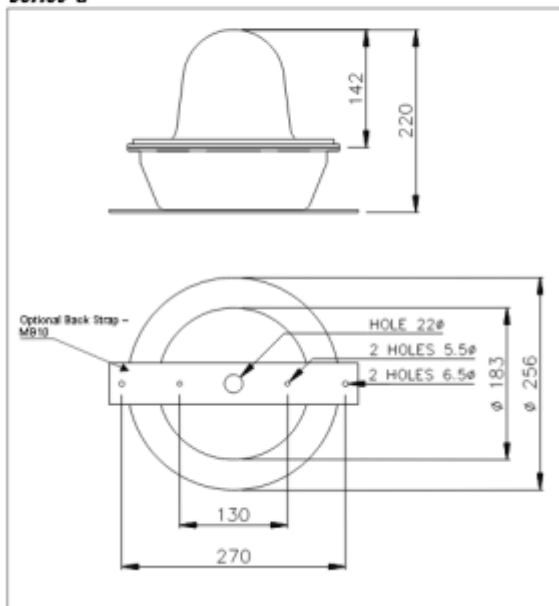

---

**Girofar cu filament static  
diam. 79mm**

# SBD

- Protectie: IP65
- Lampi: 12Vdc12W, 24Vdc12W, 24Vac12W, 115Vac15W si 230Vac15W
- Inaltime-102mm, diametru-79mm
- Compatibil cu sistemele BESA

Se livreaza complet ansamblat, cu urmatoarele optiuni:

## Lentile

- **ROSU**
- **GALBEN (AMBER)**
- **VERDE**
- **ALBASTRU**
- **TRANSPARENT**

SBD/B15d  
Static Filament Beacon

